




SPECIFICATION

Material	: 304 SS, 316L SS
Finishing	: Mirror Polish
Inlet / Outlet	: 1" NPT (F)
Vent	: 1/4" NPT (F)
Drain	: 1/4" NPT (F)

Dimension (mm)

MODEL	CARTRIDGES	A	B	C
CFH 1-S	1 ROUND 10"	Ø 90	55	325
CFH 2-S	1 ROUND 20"	Ø 90	55	575
CFH 3-S	1 ROUND 30"	Ø 90	55	825
CFH 4-S	1 ROUND 40"	Ø 90	55	1075

Note : for double open end (DOE) cartridge or 222 connector single open end (SOE) cartridge

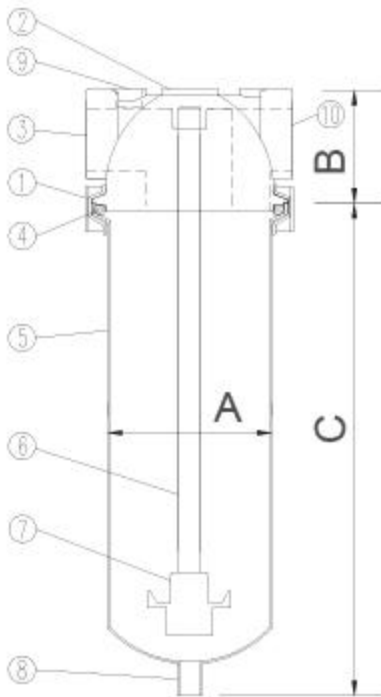

PARTS LIST

No	Description	Qty.
1	Clamp	1
2	Top Lid	1
3	Outlet	1
4	Body-Top Lid O-ring	1
5	Body	1
6	Thread Rod	1
7	Cartridge Fixture	1
8	Drain	1
9	Vent	1
10	Inlet	1

Design pressure : 125 psi
 Max. Operating pressure : 100 psi
 Design temperature : 50 to 200 Degree Celcius