HYDOREX™

EVCW SERIES STRING WOUND FILTER CARTRIDGE

MATERIAL

EVCW is being produced by Sring Wound method, using PP, PE fiber and cotton material and especially winding part is produced equally in the optimum filtering condition achieved with robbing method of construction of international size by processing with PP-Core and SS-Core.

SPECIFICATION

Micron Rating : 0.5 μm, 1.0 μm, 5 μm, 10 μm, 25 μm and 50 μm
Length (mm) : 250, 500, 750, 1000
Outer Diameter : Standard Φ 63 mm
Inner Diameter : Standard Φ 28 mm
Max. ΔP(psi) : 39 (Operation : 22)
Max. Temp. (℃) : 60
Construction : Media - PP fiber, Cotton fiber
Core - PP, Stainless Steel
Integrally fiber media : No foaming and No pre-rinsing
Graded density structure : Lower density at the surface of the filter with progressively higher density toward the center
Stable pore size and free of media migration
Depth filtration by large continuous density gradient

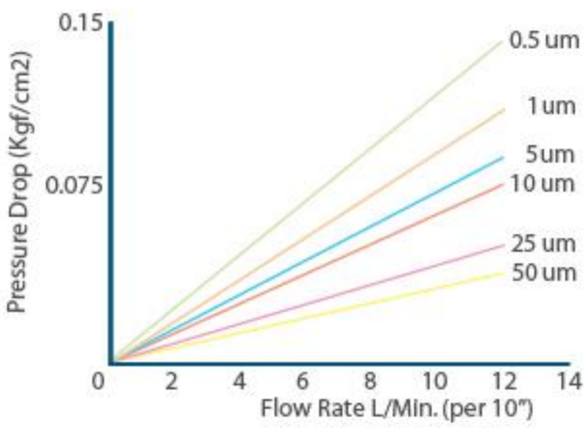

ORDERING INFORMATION

PP	-	01	-	10	-	PP
Material		Micron Rating		Length		Core
PP = PP CT = Cotton		005 = 0.5 μm 01 = 1 μm 05 = 5 μm 10 = 10 μm 25 = 25 μm 50 = 50 μm		(Nominal L.) 10 = 10" 20 = 20" 30 = 30" 40 = 40"		P = PP S = SS