




## SPECIFICATION

Material	: 304 SS, 316L SS
Finishing	: Mirror Polish, Sand Blast
Inlet / Outlet	: 1.5" NPT (F), 1.5" Flange
Vent	: 1/4" NPT (F)
Drain	: 1/4" NPT (F)

MODEL	CARTRIDGES	Dimension (mm)			
		A	B	C	D
CFH 5	5 ROUND 10"	100	250	405	200
CFH 10	5 ROUND 20"	100	250	645	200
CFH 15	5 ROUND 30"	100	250	1035	200
CFH 20	5 ROUND 40"	100	250	1255	200

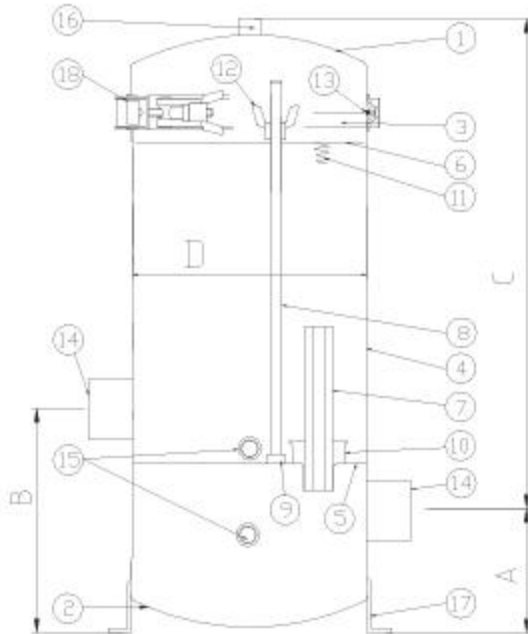

Design pressure : 125 psi  
 Max. Operating pressure : 100 psi  
 Design temperature : 50 to 200 Degree Celcius

## PARTS LIST

No	Description	Qty.
1	Top Lid	1
2	Bottom Lid	1
3	Neck Bracket	1
4	Body	1
5	Cartridge Support Plate	1
6	Press Plate	1
7	Cartridge Position Bar	5
8	Thread Rod	1
9	Fixed Nut	1
10	Cartridge Position Cup	5
11	Press Spring	5
12	Hexagon Nut	1
13	O-Ring	1
14	Inlet / Outlet	2
15	Drain	1
16	Vent	1
17	Housing Leg	4
18	V - Clamp	1