




## SPECIFICATION

Material	: 304 SS, 316L SS
Finishing	: Mirror Polish, Sand Blast
Inlet / Outlet	: 2" NPT (F), 2" Flange
Vent	: 1/4" NPT (F)
Drain	: 1/2" NPT (F)

MODEL	CARTRIDGES	Dimension (mm)			
		A	B	C	D
CFH 7	7 ROUND 10"	110	250	405	230
CFH 14	7 ROUND 20"	110	250	645	230
CFH 21	7 ROUND 30"	110	250	1035	230
CFH 28	7 ROUND 40"	110	250	1255	230

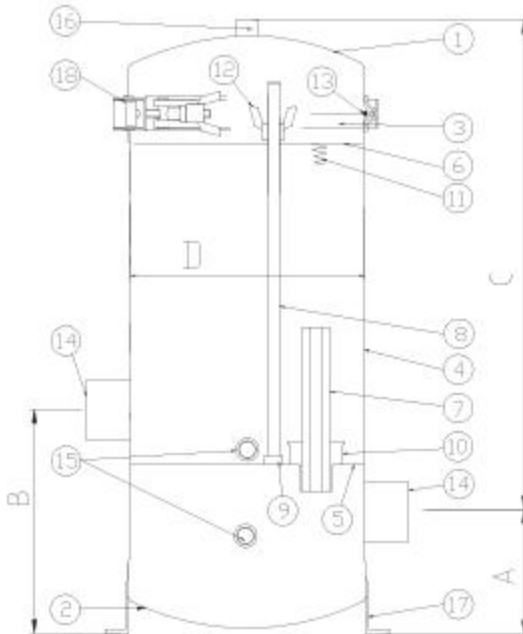

Design pressure : 125 psi  
 Max. Operating pressure : 100 psi  
 Design temperature : 50 to 200 Degree Celcius

## PARTS LIST

No	Description	Qty.
1	Top Lid	1
2	Bottom Lid	1
3	Neck Bracket	1
4	Body	1
5	Cartridge Support Plate	1
6	Press Plate	1
7	Cartridge Position Bar	7
8	Thread Rod	3
9	Fixed Nut	3
10	Cartridge Position Cup	7
11	Press Spring	7
12	Hexagon Nut	3
13	O-Ring	1
14	Inlet / Outlet	2
15	Drain	1
16	Vent	1
17	Housing Leg	4
18	V - Clamp	1