


SPECIFICATION

Material	: 304 SS, 316L SS
Finishing	: Mirror Polished
Inlet / Outlet	: 1.5" to 2" Tricllover
Vent	: 1/4" NPT (F)

Tricllover Connection		Dimension (mm)			
MODEL	CARTRIDGES	A	B	C	D
5SH 1	5 ROUND 10"	350	450	220	120
5SH 2	5 ROUND 20"	350	700	220	120
5SH 3	5 ROUND 30"	350	950	220	120
5SH 4	5 ROUND 40"	350	1200	220	120
7SH 1	7 ROUND 10"	400	700	250	150
7SH 2	7 ROUND 20"	400	950	250	150
7SH 3	7 ROUND 30"	400	1200	250	150
7SH 4	7 ROUND 40"	400	1450	250	150

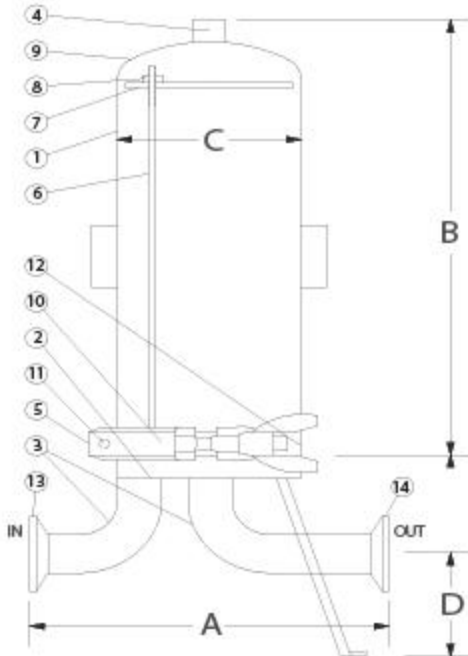

PARTS LIST		
No	Description	Qty.
1	Body	1
2	Bottom base	1
3	Pipe	2
4	Vent	1
5	V-clamp	1
6	Thread rod	3
7	Press plate	1
8	Hexagon nut	3
9	Top lid	1
10	Cartridge support plate	1
11	O-ring	1
12	Neck bracket	1
13	Inlet	1
14	Outlet	1

Design pressure : 125 psi
 Max. Operating pressure : 100 psi
 Design temperature : 50 to 200 Degree Celcius