



SPECIFICATION

Material : 304 SS, 316L SS,
Carbon Steel with rubber lining


Finishing : Paint Coated, Sand Blast, Mirror Polished

Inlet / Outlet : Various sizes to suit customer's requirement

For : Sand, Carbon, Resin and others

| MODEL | M ³ /HR | A | B | C |
|----------------|--------------------|------|------|------|
| MM 250 X 2200 | 1 | 250 | 1380 | 2200 |
| MM 350 X 2200 | 2 | 350 | 1380 | 2200 |
| MM 400 X 2200 | 3 | 400 | 1600 | 2200 |
| MM 500 X 2700 | 4 | 500 | 1750 | 2700 |
| MM 600 X 2800 | 6 | 600 | 1830 | 2800 |
| MM 750 X 2800 | 10 | 750 | 1830 | 2800 |
| MM 900 X 2800 | 14 | 900 | 1830 | 2800 |
| MM 1000 X 2800 | 17 | 1000 | 1830 | 2800 |
| MM 1200 X 3400 | 24 | 1200 | 2390 | 3400 |
| MM 1500 X 3400 | 38 | 1500 | 2390 | 3400 |

Note : Other custom made sizes available upon request

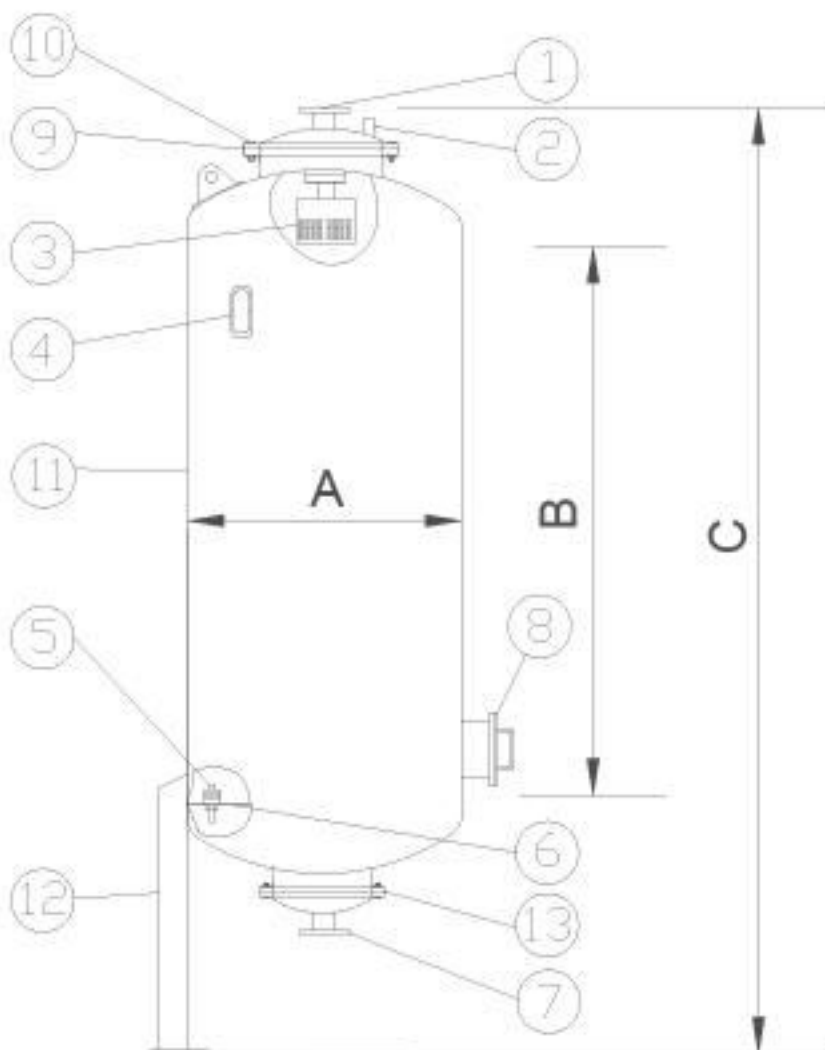

| PARTS LIST | |
|------------|--------------|
| No. | Description |
| 1 | Inlet |
| 2 | Vent |
| 3 | Strainer |
| 4 | Side Glass |
| 5 | Nozzle |
| 6 | Bottom Plate |
| 7 | Outlet |
| 8 | Drain |
| 9 | Manhole |
| 10 | Bolt & Nut |
| 11 | Body |
| 12 | Leg |
| 13 | Bottom Hole |

Design pressure : 185 psi
 Max. Operating pressure : 150 psi
 Design temperature : 50 to 200 Degree Celcius